



# HEKU 3 HIGH-SPEED ROBOT

**20 % shorter mold-open time!**

Acceleration up to **100 m/s<sup>2</sup>**

Speed max. **8 m/s**

Noticeable increase in output due to shorter cycle times

**Example:** Automation for Petri dishes 8+8 cavities

**HEKU 2 standard:**

Complete cycle: 5 seconds

Mold-open time: 0.8 seconds

Output (h): 11,500 parts


**HEKU 3 efficiency:**

Output (h): 11,900 parts

Transfer load max. **260 kg**

Performance independent of transfer load

Permanent stability for high-speed- and precision applications

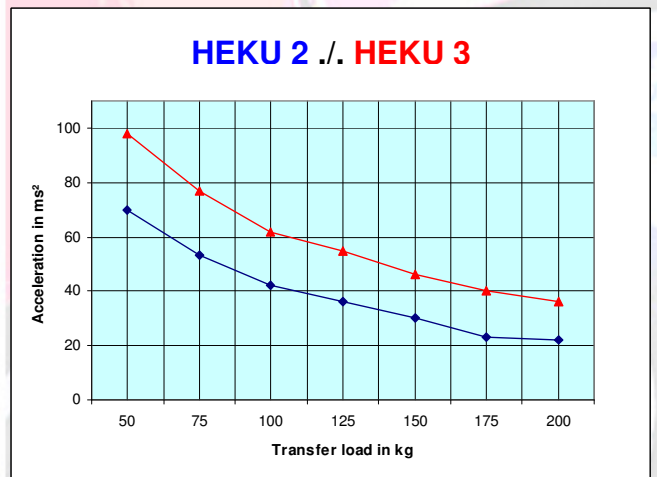

**HEKUMA GmbH**  
 Freisinger Str. 3 b  
 85386 Eching - Germany  
 Tel.: +49 8165/633-0  
 www.hekuma.com  
 sales@hekuma.com

**Technology partner for the plastics industry**  
 Automotive+++Medical+++Lifestyle+++Packaging+++Digital-  
 Audio+++Automotive+++Medical+++Lifestyle+++Packaging+++  
 Digital-Audio+++Automotive+++Medical+++Lifestyle+++Packagi  
 +++Digital-Audio+++Automotive+++Medical+++Lifestyle+++Pac  
 Digital-Audio+++Lifestyle+++Packaging+++Medical+++Automot



# HEKU 3 HIGH-SPEED ROBOT

**20 % shorter mold-open time!**

**Acceleration up to 100m/s<sup>2</sup>**

**Speed max. 8 m/s**

**Noticeable increase in output due to shorter cycle times**

- Innovation for speed

**High uptime**

**Precise operational sequences**


**High quality**

**Liability**

**Modular design**

**Certified reliability**

- Innovation for reliability

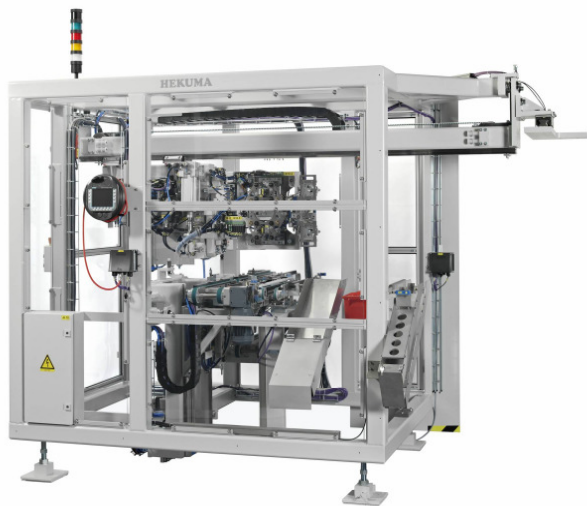

**Positioning accuracy min 0.01 mm**

**High precision at high speed applications**

- Innovation for precision

